



PROSISTEK
Profesyonel Sistem Teknolojileri



M095



General Information

M095 uses the material, equally classified as SMO254. It has outstanding corrosion resistance and the resistance against erosion from crack. Besides, the material contains more volume of nickel, chromium, and molybdenum, which reinforces the capability to resist erosion and prevent cracking.

M095 is suitable for working conditions filled with chlorine such as swimming pool.

Industries

Refrigeration, Swimming Pool

Connection (up to)



Male Thread PT 1-1/4"
Female Thread PT 1"



Solder 1-3/8"

Applications

cooler

Max. Heat Transfer Capacity

N/A


Specifications

Standard Materials

Cover Plates	Stainless Steel
Connections	Stainless Steel
Plates	Stainless Steel
Braze Material	nickel

Standard Data

Max. working temperature °C	200
Max. working pressure (bar)	10
Min. test pressure (bar)	15
Max. flow rate (LPM)	260
Max. number of plates (N)	80
Plate Heat Transfer Area (M ²)	0.0475m ²
Thickness (mm) - H	10.0+2.40*N
Weight (kg) (without connection)	2.64+0.240*N

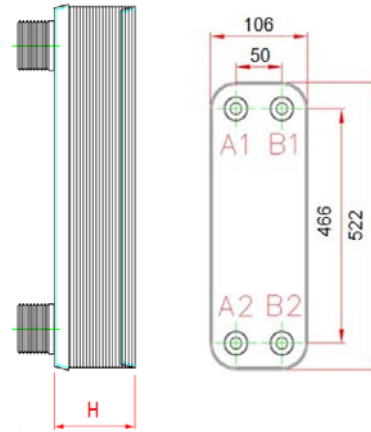

(size: mm)

Material disclaimer

This information is intended to serve as a reference and is not subject to guarantee. Precise inquiries are necessary for accurate information regarding performance specifications and suitability under specific working conditions. Responsibility rests on purchasers to decide whether products are appropriate for use before purchasing. Kaori is not liable for corrosion of products and/or other equipment from use of products. Kaori reserves the right to make changes to this information without prior notice. Third party approvals and certifications are available upon request.

Kaori Heat Treatment Co., Ltd. Innovation • Quality • Responsibility • Honor

Prosistek Mühendislik Endüstri San. Ve Tic. Ltd. Şti.

Hacı Halil Mah. 1207. Sok. No:1/5
Gebze/Kocaeli - Turkey

Tel : +90 553 957 45 96

info@prosistek.com.tr
www.prosistek.com.tr